

AKR 758 UK IXL

12NC: 857875815000

GTIN (EAN) code: 8003437205866

Whirlpool

SENSING THE DIFFERENCE



Whirlpool freestanding cooker hood: 90cm - AKR 758 UK IXL

This Whirlpool freestanding Cooker Hood features: dishwasher-safe, washable aluminium grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Between 60cm and 90cm wide appliance. Exclusive 6th SENSE sensor technology that dynamically adjusts energy consumption, depending on what you are cooking.

LED lighting

Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.

Electronic control

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.

High efficiency motor

Efficiency first. The motor in this Whirlpool Hood is designed to provide ideal filtration, while ensuring high energy efficiency.

5 Speeds

Versatile performance. This Whirlpool Hood offers 5 speed options, giving you complete control over the extraction rate.

Absolute Design Collection

This Whirlpool Hood is part of our Absolute Collection, featuring exquisite design and details. Enjoy both ideal functionality and outstanding elegance.

Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

6th Sense Absolute


Easy interaction approach thanks to the intuitive icons on the UI.

iXelium

Long lasting shine. The revolutionary iXelium treatment protects your hood from scratches and ensures a perfect shine, always. And it's easy to clean: all you need is water and a soft cloth.

Flexible Installation

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

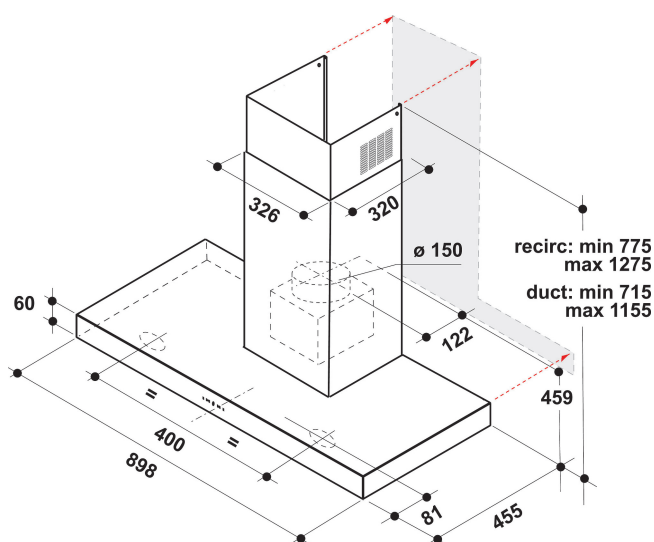

- iXelium finishing
- 6TH Sense technology
- Maximum noise level 66 dBA
- Noise Level (min. - max.): 37-66 dBA
- Air Flow (min. - max.): 135, 625, booster 779 m3/h
- Maximum extraction rate: 625 (m3/h)
- Energy class A+
- Extraction / Recirculation Rate
%Z_REQ_MAX_OUT_EXTRACTION% / 427 m3/h
- Speeds: 5 + Booster
- 2 LED, 5 W lamps
- 1 x 300 W motor
- Electronic Touch control
- 3 Washable aluminium filters
- Grease Filtering Efficiency Class: B
- Lighting Efficiency Class: A
- Fluid Dynamic Efficiency Class: A

AKR 758 UK IXL

12NC: 857875815000

GTIN (EAN) code: 8003437205866

Whirlpool

SENSING THE DIFFERENCE

MAIN FEATURES

| | |
|---|----------------------------------|
| Product group | Hood |
| Colour body | Inox |
| Material body | iXelium |
| Colour chimney | Inox |
| Material chimney | Stainless steel |
| Typology | Manual |
| Installation type | Free-standing |
| Type of control | Electronic |
| Type of control settings | - |
| Decor panel options | N/A |
| Motor location | Integrated motor in hood chimney |
| Operating Mode | Convertible |
| Electrical connection rating (W) | 315 |
| Current (A) | 1,4 |
| Voltage (V) | 220-240 |
| Frequency (Hz) | 50/60 |
| Length of Electrical Supply Cord (cm) | 150 |
| Plug type | No |
| Chimney height (mm) | 615-810 |
| Height of product, without chimney (mm) | 600 |
| Height of the product | 650 |
| Width of the product | 900 |
| Depth of the product | 455 |
| Minimum niche height | 0 |
| Minimum niche width | 0 |
| Niche depth | 0 |
| Net weight (kg) | 19.3 |

TECHNICAL FEATURES

| | |
|---|--------------------|
| Type of manual control devices | Touch control |
| Type of automatic control devices | - |
| Number of motors | 1 |
| Total power of the motors (W) | 300 |
| Number of speed settings: boost option availability | 5 |
| Boost presence | Yes |
| Maximum output air extraction (m³/h) | 779 |
| Boost position air extraction (m³/h) | 779 |
| Maximum output recirculating air (m³/h) | 427 |
| Boost position output recirculating (m³/h) | 441 |
| Light Control Type | Continuous |
| Number of lights | 2 |
| Type of lamps used | LED |
| Total power of the lamps (W) | 5 |
| Diameter of air outlet (mm) | 150 |
| No-return airflow flap | No |
| Grease filter material | Washable aluminium |
| Odour filter | No |

PERFORMANCES

| | |
|---|----|
| Sound power at min. speed (2010/30/EU) | 37 |
| Sound power at max. speed (2010/30/EU) | 66 |
| Noise level with boost position (dB(A) re 1 pW) | 0 |

