AKR 504 UK IX


12NC: 857850415000

GTIN (EAN) code: 8003437205910







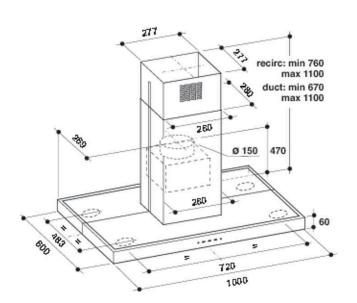

- **6TH Sense technology**
- Noise Level (min. max.): 52-69 dBA
- Air Flow (min. max.): 304, 581, booster 713 m3/h
- Maximum extraction rate: 581 (m3/h)
- Energy class B
- Extraction / Recirculation Rate %Z_REQ_MAX_OUT_EXTRACTION% / 343 m3/h
- Speeds: 4 + Booster
- 4 LED, 10 W lamps
- 1 x 260 W motor
- Electronic LCD touch control
- 3 Washable aluminium filters
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: A
- Fluid Dynamic Efficiency Class: B
- Operating Mode: Air extraction, Recirculating air
- · Inox Finishing

Whirlpool island cooker hood: 100cm - AKR 504 UK IX

This Whirlpool island Cooker Hood features: dishwashersafe, washable aluminium grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. More than 90cm wide appliance. Exclusive 6th SENSE sensor technology that dynamically adjusts energy consumption, depending on what your are cooking.

LED lighting

Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.

Electronic control

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.

High efficency motor

Efficiency first. The motor in this Whirlpool Hood is designed to provide ideal filtration, while ensuring high energy efficiency.

4 Speeds

Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.

Attractive Design

Visitors and your family alike will love the attractive design of this hood, which you can match with other Whirlpool Built-In kitchen appliances.

Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

6th sense

Exceptional energy savings. The exclusive 6th SENSE technology allows your hood to dynamically adjust its energy consumption, based on what your are cooking.

Flexible Installation

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

Booster

Odour-free cooking. This Whirlpool Hood features an extraction booster, that ensures ideal air filtration and odour and grease aspiration.

AKR 504 UK IX

12NC: 857850415000

GTIN (EAN) code: 8003437205910



MAIN FEATURES				
Product group	Hood			
Colour body	Inox			
Material body	Stainless steel			
Colour chimney	Inox			
Material chimney	Stainless steel			
Typology	Island/Ceilling			
Installation type	Island			
Type of control	Electronic			
Type of control settings	-			
Decor panel options	N/A			
Motor location	N/A			
Operating Mode	Convertible			
Electrical connection rating (W)	0			
Current (A)	1,18			
Voltage (V)	220-240			
Frequency (Hz)	50			
Length of Electrical Supply Cord (cm)	0			
Plug type	No			
Chimney height (mm)	560			
Height of product, without chimney (mm)	60			
Height of the product	772			
Width of the product	1000			
Depth of the product	600			
Minimum niche height	0			
Minimum niche width	0			
Niche depth	0			
Net weight (kg)	30.5			

TECHNICAL FEATURES		
Type of manual control devices	LCD touch control	
Type of automatic control devices	-	
Number of motors	1	
Total power of the motors (W)	260	
Number of speed settings: boost option availability	4	
Boost presence	Yes	
Maximum output air extraction (m³/h)	581	
Boost position air extraction (m³/h)	713	
Maximum output recirculating air (m³/h)	343	
Boost position output recirculating (m³/h)	352	
Light Control Type	On/Off	
Number of lights	4	
Type of lamps used	LED	
Total power of the lamps (W)	10	
Diameter of air outlet (mm)	0	
No-return airflow flap	No	
Grease filter material	Washable aluminium	
Odour filter	No	

PERFORMANCES	
Sound power at min. speed (2010/30/EU)	52
Sound power at max. speed (2010/30/EU)	69
Noise level with boost position (dB(A) re 1 pW)	0

