AKR 982 IX 12NC: 857898201000 GTIN (EAN) code: 8003437942808





250 240 Ø 150 603 ÷ 1130 450 410 280 *4>*0 515 900

- Maximum noise level 64 dBA
- Noise Level (min. max.): 46-62 dBA
- Air Flow (min. max.): 165, 336 m3/h
- Maximum extraction rate: 336 (m3/h)
- Energy class E
- 3 speed settings
- 2 Halogen, 40 W lamps
- 1 x 120 W motor
- Mechanical Buttons
- 1 Washable aluminium filter
- Inox and Glass Hood
- Grease Filtering Efficiency Class: D
- Lighting Efficiency Class: E
- Fluid Dynamic Efficiency Class: F
- Operating Mode: Air extraction, Recirculating air
- **Inox Finishing**
- 1 Motor

Whirlpool wall mounted cooker hood - AKR 982 IX

This Whirlpool wall mounted Cooker Hood features: dishwasher-safe, washable aluminium grease filters. An outstanding cooker extractor fan, ensuring a fresh, greasefree cooking environment. Between 60cm and 90cm wide appliance. New design ensuring extra silent performance.



Flexible Installation

Mechanical control

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

Effortless control. This Whirlpool Hood includes an analogue control interface designed for simplicity and



Halogen Lamps

ease-of-use.

Halogen lamps generate 3 times more light than normal lamps, so you can always see what's cooking.

3 Speeds

Versatile performance. This Whirlpool Hood offers 3 speed options, giving you complete control over the extraction rate.

Wall-mounted installation

Wall-mounted installation. This wall-mounted Whirlpool Hood is a breeze to install.

Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

Glass design

Designed to delight. Modern, sleek and beautiful, this glass hood is designed to be an eye-catching addition to your home.

Energy class E

This is an Energy Class E appliance.

2 lights

Perfect lighting. This Whirlpool Hood features two integrated lights, providing ideal illumination, so you'll always be able to see what's cooking.







AKR 982 IX


12NC: 857898201000 GTIN (EAN) code: 8003437942808



MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel / glass
Colour chimney	-
Material chimney	-
Туроlоду	Wall-mounted
Installation type	Wall-mounted
Type of control	Mechanical
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood chimney
Operating Mode	Convertible
Electrical connection rating (W)	160
Current (A)	0,7
Voltage (V)	220-240
Frequency (Hz)	50/60
Length of Electrical Supply Cord (cm)	150
Plug type	Europlug
Chimney height (mm)	76-603
Height of product, without chimney (mm)	70
Height of the product	1130
Width of the product	898
Depth of the product	415
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	16.55

TECHNICAL FEATURES		
Type of manual control devices	Buttons	
Type of automatic control devices	-	
Number of motors	1	
Total power of the motors (W)	120	
Number of speed settings: boost option availability	3	
Boost presence	No	
Maximum output air extraction (m³/h)	400	
Boost position air extraction (m ³ /h)	0	
Maximum output recirculating air (m³/h)	250	
Boost position output recirculating (m³/h)	0	
Light Control Type	On/Off	
Number of lights	2	
Type of lamps used	Halogen	
Total power of the lamps (W)	40	
Diameter of air outlet (mm)	150	
No-return airflow flap	Yes	
Grease filter material	Washable aluminium	
Odour filter	No	

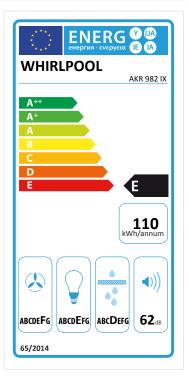

PERFORMANCES

Sound power at min. speed (2010/30/EU)	46
Sound power at max. speed (2010/30/EU)	62
Noise level with boost position (dB(A) re 1 pW)	0