


KEICD 10010

12NC: 851351201000

GTIN (EAN) code 8003437220975

KitchenAid

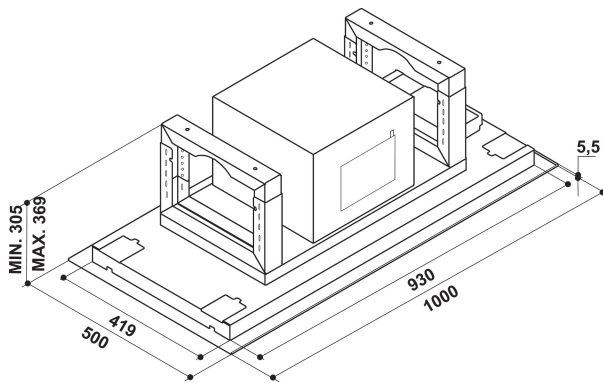

MAIN FEATURES

| | |
|---|-------------------------------|
| Product group | Hood |
| Colour body | Inox |
| Material body | Stainless steel |
| Colour chimney | N/A |
| Material chimney | N/A |
| Typology | Manual |
| Installation type | Built-in |
| Type of control | Electronic |
| Type of control settings | - |
| Decor panel options | N/A |
| Motor location | Integrated motor in hood body |
| Operating Mode | Convertible |
| Electrical connection rating (W) | 270 |
| Current (A) | 1,2 |
| Voltage (V) | 220-240 |
| Frequency (Hz) | 50/60 |
| Length of Electrical Supply Cord (cm) | 150 |
| Plug type | Schuko |
| Chimney height (mm) | 0 |
| Height of product, without chimney (mm) | 369 |
| Height of the product | 369 |
| Width of the product | 1000 |
| Depth of the product | 500 |
| Minimum niche height | 0 |
| Minimum niche width | 0 |
| Niche depth | 0 |
| Net weight (kg) | 20 |

TECHNICAL FEATURES

| | |
|---|--------------------|
| Type of manual control devices | Buttons |
| Type of automatic control devices | - |
| Number of motors | 1 |
| Total power of the motors (W) | 260 |
| Number of speed settings: boost option availability | 3 |
| Boost presence | No |
| Maximum output air extraction (m ³ /h) | 647 |
| Boost position air extraction (m ³ /h) | 0 |
| Maximum output recirculating air (m ³ /h) | 0 |
| Boost position output recirculating (m ³ /h) | 0 |
| Light Control Type | On/Off |
| Number of lights | 4 |
| Type of lamps used | LED |
| Total power of the lamps (W) | 10 |
| Diameter of air outlet (mm) | 150 |
| No-return airflow flap | No |
| Grease filter material | Washable aluminium |
| Odour filter | No |

PERFORMANCES

| | |
|---|----|
| Sound power at min. speed (2010/30/EU) | 49 |
| Sound power at max. speed (2010/30/EU) | 72 |
| Noise level with boost position (dB(A) re 1 pW) | 0 |