
AKZM 755/IX

12NC: 852575538000

GTIN (EAN) code: 8003437818851





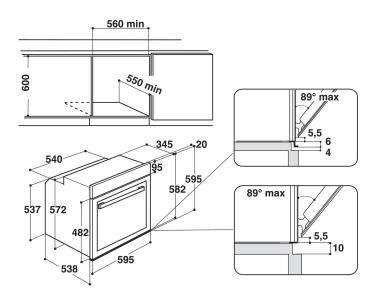

- Pyrolytic cleaning system
- Energy class A+
- Cavity 73 L
- Cook3
- Ready2Cook
- Defrost function
- Forced Air Fan Cooking
- Grill
- Easy Clean Enamel Interior
- Turbo grill function
- Maxi cooking
- Pastry function
- Special functions
- Fast Pre-Heating
- Conventional Cooking
- "Push Push" knobs
- Cool Door: 4 Glasses

Whirlpool built in electric oven: inox color, self cleaning - AKZM 755/IX

This Whirlpool built in Oven features: self cleaning technology, that uses a high-temperature cycle to burn food residues into ashes, which can then be easily wiped away with a sponge. Advanced electric technology allowing you to cook dishes saving energy. Halogen lamp allowing a more energy-efficient performance. Innovative Cook3 function, that allows you to cook up to three separate dishes at the same time, without the risk of aromas mixing. Ready2Cook function, that uses a powerful convection system to quickly reach the right temperature, and completely eliminate preheating need.



Ready2cook

No pre-heating required. The Ready2Cook function uses a powerful convection system to quickly reach the right temperature, and completely eliminate the need for pre-heating.



Cook3

No aroma mixing. With the innovative Cook3 function, you can cook up to three separate dishes at the same time, without the risk of aromas mixing.



LCD graphic assisted display

An intuitive LCD graphic display to assist you during cooking. It includes 9 special functions to help streamline your recipes.



Push push

The knobs' 'push push' design ensure extra comfortable ease of use and a premium look.



Pyrolitic technology

Spotless cleaning at the touch of a button. Pyrolytic technology uses a high-temperature cycle to burn food residues into ashes, which can then be easily wiped away with a sponge. Heat-reflecting glass panels in the oven door ensure that the external temperature stays low, for added safety.



XXL cavity

All the space you need. The XXL cavity in your oven has a capacity of 75 litres with 5 different shelf positions available.



Energy class

Outstanding energy savings. Ovens with an A/ A+ energy rating offer an excellent level of energy efficiency, ensuring lower consumption and saving you money on your energy bills.



Multifunction 8

Multiple cooking methods. The Multifunction 8 feature offers flexible cooking options, to ensure perfect results, whatever the recipe.

AKZM 755/IX

12NC: 852575538000

GTIN (EAN) code: 8003437818851



SENSING THE DIFFERENCE

Commercial code AKZM 755/IX Main colour of product Inox Construction type Built-in Type of control Mechanical and electronic Type of control settings - Are any hobs controls integrated? No Which kind of hobs can be controlled? - Automatic programmes Yes Current (A) 13 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 90 Plug type No Depth with open door 90 degree (mm) - Height of the product 595 Width of the product 595 Depth of the product 564 Minimum niche height 0 Minimum niche width 0 Niche depth 0 Niche depth (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	MAIN FEATURES		
Main colour of product Construction type Built-in Type of control Mechanical and electronic Type of control settings - Are any hobs controls integrated? No Which kind of hobs can be controlled? Automatic programmes Ves Current (A) 13 Voltage (V) Frequency (Hz)	Product group	Oven	
Construction type Built-in Type of control Mechanical and electronic Type of control settings - Are any hobs controls integrated? No Which kind of hos can be controlled? - Automatic programmes Yes Current (A) 13 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 90 Plug type No Depth with open door 90 degree (mm) - Height of the product 595 Width of the product 595 Width of the product 595 Depth of the product 564 Minimum niche height 0 Niche depth 0 Niche depth 0 Niche depth (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Commercial code	AKZM 755/IX	
Type of control Type of control settings	Main colour of product	Inox	
Type of control settings	Construction type	Built-in	
Are any hobs controls integrated? Automatic programmes Current (A) Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Pug type Depth with open door 90 degree (mm) Height of the product Depth of the	Type of control	Mechanical and electronic	
Which kind of hobs can be controlled? Automatic programmes Current (A) Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Plug type Depth with open door 90 degree (mm) Height of the product Depth o	Type of control settings	-	
Automatic programmes Current (A) 13 Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Plug type Depth with open door 90 degree (mm) Height of the product Depth of the product	Are any hobs controls integrated?	No	
Current (A) 13 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 90 Plug type No Depth with open door 90 degree (mm) - Height of the product 595 Width of the product 564 Depth of the product 564 Minimum niche height 0 Minimum niche width 0 Niche depth 0 Net weight (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Which kind of hobs can be controlled?	-	
Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Plug type Depth with open door 90 degree (mm) Height of the product Width of the product Seps Depth of the product Seps Depth of the product Minimum niche height O Minimum niche width O No No Plug type A Seps Depth of the product Seps Depth of the product Seps Depth of the product Minimum niche width O No No No Pyrolytic Grids of the cavity 220-240 50/60 100 100 100 100 100 100 100	Automatic programmes	Yes	
Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 90 Plug type No Depth with open door 90 degree (mm) - Height of the product 595 Width of the product 595 Depth of the product 564 Minimum niche height 0 Minimum niche width 0 Niche depth 0 Net weight (kg) 0 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Current (A)	13	
Length of Electrical Supply Cord (cm) Plug type Depth with open door 90 degree (mm) Height of the product Width of the product Depth of the product Depth of the product Minimum niche height Minimum niche width Niche depth No Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Grids of the cavity Pool No No No No No No No No No	Voltage (V)	220-240	
Plug type No Depth with open door 90 degree (mm) Height of the product 595 Width of the product 595 Depth of the product 564 Minimum niche height 0 Minimum niche width 0 Niche depth 0 Net weight (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Frequency (Hz)	50/60	
Depth with open door 90 degree (mm) Height of the product Width of the product Depth of the product Minimum niche height Minimum niche width Niche depth Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Pyrolytic Grids of the cavity	Length of Electrical Supply Cord (cm)	90	
Height of the product Width of the product Depth of the product Minimum niche height Minimum niche width O Niche depth Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Fyrolytic Grids of the cavity 595 595 00 00 00 00 00 00 00	Plug type	No	
Width of the product Depth of the product Minimum niche height Minimum niche width Minimum niche width Niche depth Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Grids of the cavity 1595 595 604 0 0 0 105 105 105 105 105 10	Depth with open door 90 degree (mm)	-	
Depth of the product 564 Minimum niche height 0 Minimum niche width 0 Niche depth 0 Net weight (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Height of the product	595	
Minimum niche height Minimum niche width O Niche depth Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Grids of the cavity 2	Width of the product	595	
Minimum niche width Niche depth Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Grids of the cavity 2	Depth of the product	564	
Niche depth 0 Net weight (kg) 40.5 Usable volume (of cavity) 73 Integrated Cleaning system Pyrolytic Grids of the cavity 2	Minimum niche height	0	
Net weight (kg) Usable volume (of cavity) Integrated Cleaning system Pyrolytic Grids of the cavity 2	Minimum niche width	0	
Usable volume (of cavity) Integrated Cleaning system Pyrolytic Grids of the cavity 2	Niche depth	0	
Integrated Cleaning system Pyrolytic Grids of the cavity 2	Net weight (kg)	40.5	
Grids of the cavity 2	Usable volume (of cavity)	73	
·	Integrated Cleaning system	Pyrolytic	
Trays 1	Grids of the cavity	2	
	Trays	1	

TECHNICAL FEATURES	
Timer	-
Time control	Electronic
Time-setting options	-
Safety device	-
Interior light	Yes
Number of interior lights of the cavity	1
Position of interior lights of the cavity	Rear
Oven guides of the cavity	Grids
Probe of the cavity	No

PERFORMANCES	
Energy input	Electric
Type of energy of the cavity	Electricity
Energy efficiency class - NEW (2010/30/EU)	A+
Energy consumption per cycle conventional - NEW (2010/30/EU)	0.91
Energy consumption per cycle forced air convection - NEW (2010/30/EU)	0.7

